

FLOS

F6563030 Black

Tab Table

Designed by Edward Barber and Jay Osgerby, 2011

9W - 347lm - 2700K - CRI> 80

Table and floor lamps providing direct lighting with adjustable head. Body in painted pressofused aluminium. Multi-led diffuser in specially designed PMMA to avoid the Multi Shadow effect and dazzle. Head rotation from $\pm 90^\circ$.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

| | |
|------------------------|---------------------|
| EAN | 8059607006535 |
| Mounting | Table |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | LED Module |
| Power (W) | 9 |
| Lumen Output (lm) | 347 |

Physical

| | |
|---------------------|-------|
| Colour | Black |
| Length (mm) | 175 |
| Cord colour | Black |
| Net weight (kg) | 0.91 |
| Package height (mm) | 190 |
| Package width (mm) | 320 |
| Package length (mm) | 410 |
| Package volume (m3) | 0.02 |
| IP internal | 20 |



Download

Mounting instructions [Download PDF](#)

Mounting instructions [Download PDF](#)

Photometric Files


LDT / IES [Download LDT](#)

Technical Drawings

2D [Download ZIP](#)



Schematic light drawing



Photometric


| | |
|--------------------|------------|
| Light distribution | Asymmetric |
| CCT (K) | 2700 |
| CRI> | 80 |
| Extreme cut off | No |

Electrical


| | |
|--------------------|------------------------|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240 |
| Power supply | Remote included |
| Dimmable | Yes |
| Power supply type | Electronic 24V |
| Dimming interface | Dimmer Integrated |
| Plug type | Type G, Type A, Type C |
| Batteries inside | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

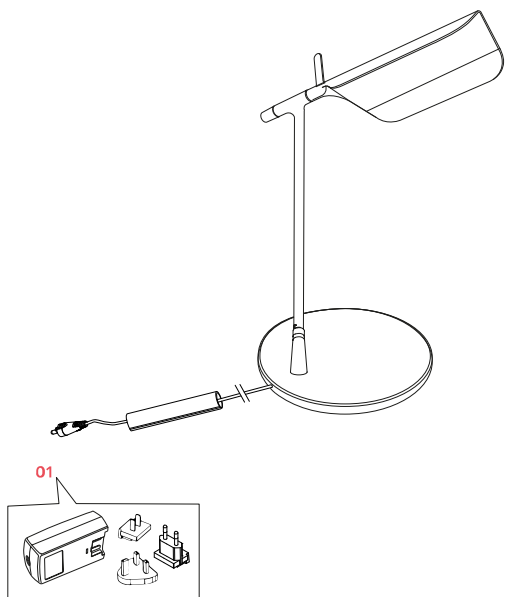

01.
- Black plug assembly kit & 24V driver
- RF3320100



RF3320100

Black plug assembly kit & 24V
driver