




Type	CLD76-11-8030-DD
Order No	CLD76-11-8030-DD
Lamp type/assembly	Pendant luminaire
Light source	LED
Colour temperature	3000 K
Colour rendering index	CRI > 80
Chromaticity tolerance (initial	3 SDCM initial
MacAdam)	
Operating mode	Dimmable DALI
Operation	On site
Ballast (number)	LED converter (3), built-in
Lamp shade	Polyester fleece
Length	5 m
Suspension (number of suspension	5
points)	
Ceiling rose	White, Ø 108 mm
Power cable	Transparent, 5 x 1.5mm² , L 10000
	mm
Light distribution	Diffuse
Total luminous flux of luminaire	32404 lm
Power consumption	280 W
Luminaire efficacy	116 lm/W
LED service life	50 000 h (L80/F10)
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0.5 W
Safety class	I
Protection type	IP 20
Packaging units	3
Weight	38.0 kg
Tooltip Description	The fairweather cloud that can be
	produced in virtually any size
Guarantee	36 months

Belux AG
Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

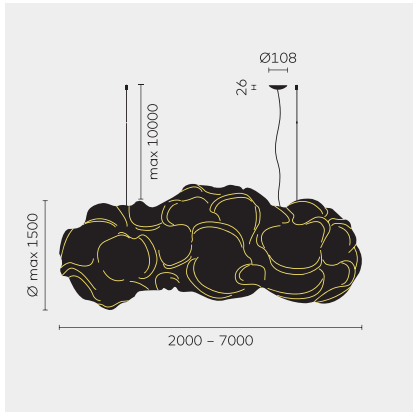