## lambert&fils

## CLIFF 08



Type Suspension

Materials Body: brass (Br)

Sphere: milk glass (G50 / G80)

Hardware: brass

Total Height Height to be specified upon order

Weight 14 Lb / 6.3 Kg

Light Bulb LED (included), 3x 4.5W + 9x 3.5W

Sockets G9

**Voltage** 120V / 240V

**Dimmer** Refer to our recommended list of dimmer models

Certifications 🗓 ( €


Notes • Must be installed by an electrician


• Additional charges for modifications


· Lead time between 7-9 weeks

· Dimensions are approximate and may vary slightly

Requires three electrical boxes

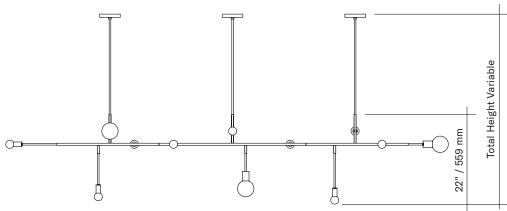




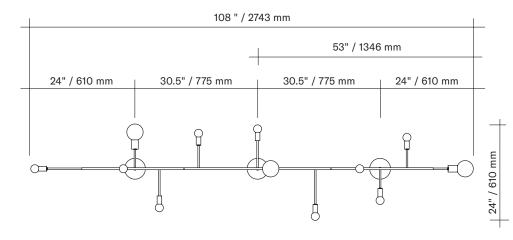


Updated: January 2019

# lambert&fils

## Order Guide: SKU

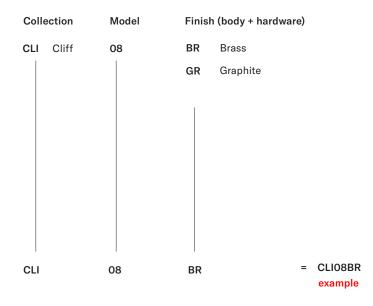



## Finish





Brass

Graphite

## Canopy


Swivel option for slanted ceiling




## lambert&fils

## **Light Source & Dimmer Specifications**

#### **G9 SOCKETS SPHERES**



100V-120V / 240V 450 Lumens 2 years warranty



Frosted 3.5W 100V-120V / 240V 350 Lumens 2700K 25000H CRI ≥ 80 2 years warranty

G80 Ø ±3" / 80 mm G50  $\emptyset$  ± 2" / 50 mm









### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

#### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

 $<sup>^{*}</sup>$ Other dimmers can yield good results and we recommend conducting your own test before final installation.